


# SATURATED "PCT" CHAMBERS

## Benchtop type PC-242HS-A

- \*PREHEATING
- \*3-PROGRAM MODE
- \*AUTO STARTER
- \*93°C STEAM AGER (SPECIAL VERSION)

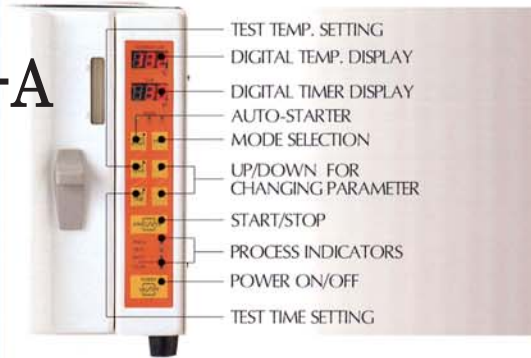

PC-242HS-A

## Vertical type PC-242, 305, 362III/SIII (SIII : with Preheating)

- \*PID CONTROL
- \*PREHEATING (SIII)
- \*WATER DROP PROOF HOOD (SIII)



PC-242III

## Special type PC-3011III

- \*PID CONTROL
- \*MAX. TEMPERATURE:  
180°C
- \*MAX. PRESSURE:  
9.2kg/cm<sup>2</sup>G



PC-305SIII



ISO 13485  
CERTIFIED

Products shown in this brochure  
are manufactured by the company,  
ISO 13485 certified.

**HMC HIRAYAMA**



**SPECIFICATIONS**


**SATURATED "PCT" CHAMBERS**

	WITH PREHEATING TYPE				WITHOUT PREHEATING TYPE			SPECIAL TYPE
	PC-242HS-A	PC-242SIII	PC-305SIII	PC-362SIII	PC-242III	PC-305III	PC-362III	PC-3011III
MODEL								
TEST CHAMBER	Horizontal	Vertical						
CHAMBER MATERIAL	Stainless Steel SUS 304							SUS 316L
OPERATION	Automatic				Semi-Automatic			
EFFECTIVE INNER SIZE (cm)	17φ×31D	17φ×35D	22φ×34D	30φ×50D	20φ×35D	25φ×34D	32φ×50D	25φ×18D
MAX. USABLE PRESSURE	2kg/cm <sup>2</sup> G	2kg/cm <sup>2</sup> G	5kg/cm <sup>2</sup> G	2kg/cm <sup>2</sup> G	2kg/cm <sup>2</sup> G	5kg/cm <sup>2</sup> G	2kg/cm <sup>2</sup> G	9.2kg/cm <sup>2</sup> G
TEST TEMP. RANGE	100~134°C	105~133°C	105~158°C	105~133°C	105~133°C	105~158°C	105~133°C	105~180°C
TEST TIME RANGE	1~255Hrs.	0.1~999.9Hrs.						
TEST HUMIDITY RANGE	100%RH Only							
TEMPERATURE ACCURACY	±1.5°C (100~104°C) ±1.0°C (105~134°C)			±1.0°C				
TEMPERATURE CONTROL	DUTY/SSR			PID/SSR				
CONTINUOUS TEST TIME	200Hrs.			500Hrs.				
WATER SUPPLY	Automatic			Manual				
TEST LEAD WIRES	4 pcs. (standard)							N.I.L.
POWER SUPPLY	AC200/220/230/240V, 50/60Hz ( Please specify voltage & cycle when ordering )							
OUTER DIMENSIONS (cm)	50.5W×38H×53.5D	75W×105H×55D	90W×105H×60D	75W×105H×55D	90W×105H×60D	90W×115H×60D		
APPROX. NET WEIGHT (kg)	39	110	135	150	75	100	130	160
SAFETY DEVICE	Pressure safety valve, Excess pressure protection device, Lack-of-water cutout switch, E.L.B., N.F.B., Thermal fuse, Fuse, Door interlock ( for 242HS-A ) etc.							
STANDARD ACCESSORIES	Power cord × 1, Rubber hose for drain × 1, Bottom plate ( except 242HS-A), Water drop proof hood ( for SIII types )							

**OPTIONS**

 <p><b>SAFETY LID COVER</b> (EXCEPT 242HS-A)</p>	 <p><b>WIREMESH BASKETS</b></p>	 <p><b>TEMP. RECORDER</b> (242HS-A : EXTERNAL / OTHERS : BUILT-IN)</p>	 <p><b>AUTO-STARTER</b> (EXCEPT 242HS-A)</p>
---	--	--	---

Specifications and appearance are subject to change without notice due to continuous product improvement.



Manufacturer :  
**HIRAYAMA** Manufacturing Corp.  
 Overseas Sales Dept.  
 1-8-12, MINATO, CHUO-KU,  
 TOKYO 104-0043, JAPAN  
 TEL:+81-3-6280-3724 FAX:+81-3-6260-3725  
<http://www.hirayama-hmc.co.jp/>

Distributor :

Manufactured under  
 ISO 13485